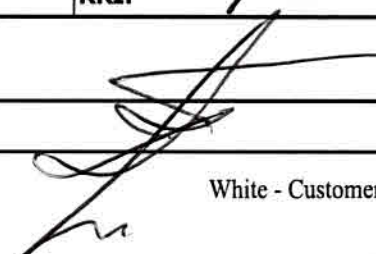


RS

ECM Trailer Repair Inc. FEDERAL ANNUAL INSPECTION - TRAILER

Vehicle Owner Name: <i>Borman Trailer Leasing LLC</i>			
Vehicle Owner Address: <i>10233 Governor Ln Blvd Williamsport MD 21795</i>			
Trailer Number: <i>127906</i>	Year: <i>2006</i>	Make: <i>Stoughton</i>	Vin# <i>013908917</i>
Date: <i>6-29-2015</i>	Plate# <i>U481528</i>	Refrigeration Hour Reading: <i>—</i>	
Inspect each item and use these codes:		Engine (<i>—</i>) Switch (<i>—</i>)	
		Hub Reading: <i>075838</i>	
Codes: Unsatisfactory = X Serviced = S Checked OK = ✓ Out of Service = 0			
Front		Sides	
Inspect 7-way receptacle.	☒	Inspect Marker Lights.	☒
Inspect Glad Hands, rubbers.	☒	Inspect Conspicuity Tape.	☒
Inspect King Pin & Plate.	☒	Inspect Bottom and Top Rails, Sheared Rivets.	☒
Inspect Clearance Lights.	☒	Check the Hub Oil Level / Vents on Grease Caps.	☒
Rear		Identification	
Inspect Mud Flaps & Brackets.	☒	Inspect Unit numbers front and rear	☒
Inspect Rear Door; opens and closes easily.	☒	Inspect License plate matches registration.	☒
Inspect Door hold backs for all Doors.	☒	Inspect Document box on Trailer Nose.	☒
Ramp		Inspect FHWA certificate in Document Box.	
Inspect Spring Assist.	☒	Underride Supports & Bar	
Inspect Stops, Locks, Chains & Handles.	☒	Steps, Anti-Slip Dock Bumpers.	
General		Inside (if Empty)	
Lubricate Landing Gear.	☒	Inspect Walls for Kemlite Damage.	<i>N/A</i>
Inspect Sand Shoes; Flat.	☒	Inspect Scuff Liner, E-Track, Pallet Stops.	☒
Inspect Bracing for legs.	☒	Inspect Bulkheads, Air Chute.	<i>N/A</i>
Blow out Drain Hoses.	☒	Egress and Ingress	
Sub Frame		Inspect all Grab Handles, Steps & Platforms.	
Inspect Rails and Crossmembers.	☒	Lubricate all Doors, Door Hinges.	
Inspect Springs, Hangers, Saddles & U-bolts.	☒	Lubricate Roll Up Door, Rollers, Hinges & Latch.	
Inspect Equalizers, Radius Rods & Bushings.	☒	Brakes	
Tires		Air Leaks, Valve Operation.	
Inspect Rims, no cracks.	☒	Inspect Brake Lining.	
Inspect Tires for irregular wear.	☒	Lubricate Cams & Slack Adjuster Zerks	
Inspect Tires, inflated to 100 p.s.i.	☒	Adjust Brakes.	
TD in 32nds / Tire Size: <i>295 75R 22.5</i>		Inspect Brake Chamber.	
LFO: <i>11</i>	RFO: <i>11</i>	Brake Pad Thickness in 1/8ths	
LFI: <i>11</i>	RFI: <i>10</i>	LF: <i>7/8</i>	RF: <i>7/8</i>
LRO: <i>5</i>	RRO: <i>5</i>	LR: <i>7/8</i>	RR: <i>7/8</i>
LRI: <i>7</i>	RRI: <i>7</i>		
Comments:			
Your Signature: 		Print Name: <i>DAREK</i>	